


AN130 AN135 AN140 AN150 -TURNBUCKLE ASSEMBLY.

Dash #	Length (Min)		Takeup		Thread	Strength
	AN130	Others	AN130	Others		
-5S*	2-3/8	2-1/8	3/8	7/16	#4-48	550LBS
-8S	4-1/2	4-1/2	1-1/4	1-3/8	#6-40	800
-16S	4-1/2	4-1/2	1-1/8	1-1/8	#10-32	1600
-16L	8	8	2-7/8	2-7/8	#10-32	1600
-22S	4-17/32	4-1/2	1	1	1/4-28	2200
-22L	8-1/32	8	2-3/4	2-3/4	1/4-28	2200
-32S	4-19/32	4-1/2	7/8	7/8	1/4-28	3200
-32L	8-7/64	8	2-5/8	2-5/8	1/4-28	3200
-46S	4-21-32	4-1/2	5/8	5/8	5/16-24	4600
-46L	8-5/32	8	2-3/8	2-3/8	5/16-24	4600
-61L	8-9/32	8	2-1/8	2-1/8	3/8-24	6100
-80L	8-5/16	8	2-1/8	2-1/8	3/8-24	8000
-125L	9-1/16	9	2-1/16	2-1/16	7/16-20	12500
-175L	9-9/16	9-1/2	2-1/16	2-1/16	1/2-20	17500


* AN135S not available. An150-5s Length = 2-5/8", Takeup = 5/16". Replace-22S & -22L with -32S & -32L



AN130- AN170 Cable Eye, AN161 Fork, AN155 Barrel



AN135- AN170 Cable Eye, AN165 Pin Eye, AN155 Barrel



AN140- AN170 Cable Eye(2), AN155 Barrel




AN150- AN161 Fork(2), AN155 Barrel


AN145 AN146 AN147 - TURNBUCKLE ASSEMBLY.

Part#	Length (Min)		Takeup	Thread	Strength
	AN145/146	AN147			
-8S	5-5/8	6-3/4	1-3/8	#6-40	480LBS
-8L*	-----	11-1/4	3-1/8	#10-32	480
-16S	5-3/4	7	1-1/8	#10-32	920
-16L	9-1/4	10-1/2	2-7/8	1/4-28	920
-22S	5-15/16	7-7/16	1	1/4-28	2000
-22L	9-7/16	10-15/16	2-3/4	1/4-28	2000
-32S	6-3/16	7-7/8	7/8	1/4-28	2800
-32L	9-11/16	11-3/8	2-5/8	1/4-28	2800
-46S	6-3/8	8-1/4	5/8	5/16-24	4200
-46L	9-7/8	11-3/4	2-3/8	5/16-24	4200
-61L	10-1/16	12-1/16	2-1/8	3/8-24	5600
-80L	10-3/8	12-11/16	2-1/8	3/8-24	7000
-125L	11-3/16	13-5/16	2-1/16	7/16-20	8000
-175L	11-3/4	14	2-1/16	1/2-20	9800


* Size 8L available as AN147 only. Part#s listed are for Cres Swaging terminals. Add F before dash for carbon steel terminals. Replace-22S & -22L with -32S & -32L.



AN145- AN669 Terminal, AN165 Pin Eye, AN155 Barrel



AN146- AN669 Terminal, AN161 Fork, AN155 Barrel




AN147- AN669 Terminal(2), AN155 Barrel

MS21251 Supercedes AN155 and NAS649 - TURNBUCKLE BARREL.

Brass per QQ-B-637. Alur Aluminum per WW-T-700/3. Letter following dash/ indicates length (short or long). MS21251 items can replace AN155 item: MS21251 items are interchangeable with NAS649 items

MS21251	Use Cliplock		Wire Rope		
	MS21256	AN155	Diameter	L	Strength
---	--	-5S	----	1-3/16	550LBS
B2S	-1	-8S	1/16	2-1/4	800
B2L	-2	-8L	1/16	4	800
B3S	-1	-16S	3/32	2-1/4	1600
B3L	-2	-16L	3/32	4	1600
B5S	-1	-32S	5/32	2-1/4	3200
B5L	-2	-32L	5/32	4	3200
B6S	-1	-46S	3/16	2-1/4	4600
B6L	-2	-46L	3/16	4	4600
B8L	-2	-80L	1/4	4	8000
B9L	-3	-125L	9/32	4-1/4	12500
B10L	-3	-175L	5/16	4-1/4	17500

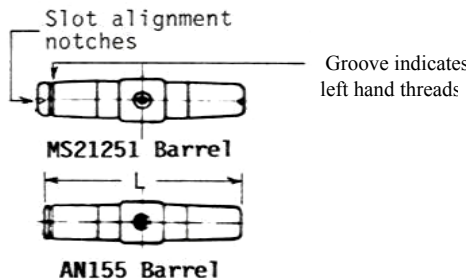

Note: Use -5 parts with 1/8" diameter wire rope, minimum breaking strength 2200 LBS as per drawing. For applications requiring AN155-22S or -22L use AN155-32S or 32L respectively. Replace B with A to denote aluminum